



Application

Mall Lighting, Home Lighting, Office Lighting, residential, villa, hotel, cafe, bar, club, etc

Features

- 1.Light body by better treatment, pressure, abrasion resistance, corrosion resistance.
- 2.Lamp chip using high brightness chip, fully automatic packing technology.
- 3.High stability, good color rendering, high photosynthetic efficiency.
- 4.Better PC material, good toughness and high strength.
- 5.High purity aluminum reflecting cover, high efficiency reflection, no oxidation fade.
- 6.Long life span of over 20,000 hours by normal use.


LED DOWN LIGHT

AL-NX-DL18W



Application

AL-NX-DL18W



a.wall lighting



b.living room lamps




c.corridor lighting



d.light in the bedroom

Size diagram

AL-NX-DL18W



Technical data

AL-NX-DL18W




1	Type of led	SMD 2835
2	Type of material	PC+ Aluminum
3	Ip	20
4	Driver	Constant Driver
5	Switch cycle	15000
6	Volt	220-240V
7	Life time	20000 hours
8	Watt	18W
9	PF	0.9
10	Hz	50Hz / 60Hz
11	Lumen	1260LM
12	Eff	70LM/W
13	CRI	80
14	Size	170*28 MM
15	CCT	6500K
16	Beam angle	109
17	NON DIMMABLE	Non adjustable




Light distribution

AL-NX-DL18W

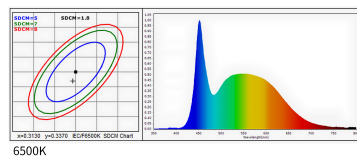

Package info

AL-NX-DL18W

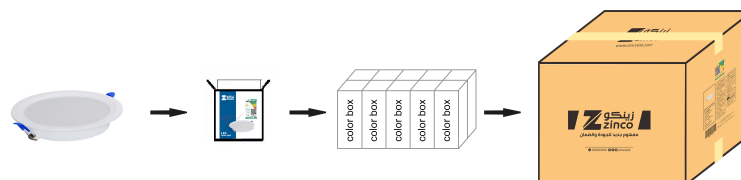

Item No	Size(mm)	Color Box size(mm)	QTY(pcs)	Carton Size(cm)	LUMEN(LM)	Efficiency(LM/W)
AL-NX-DL18W	170*28	175*40*190	40	42*37*40	1260	70

SAFETY:

- 1.Never use in the following fixtures: a.Emergency light fixtures. b.Direct current fixtures. c.Dimming circuit fixtures. d.Close fixtures.
2. Only for indoor use .never install where water may drop on the lamp.
3. When the lamp is faulty ,please destroy it.
4. It is suitable installed in an ambient temperature about 0-45 C.