



Application

Mall Lighting, Home Lighting, Office Lighting, residential, villa, hotel, cafe, bar, club, etc

Features

- 1.Light body by better treatment, pressure, abrasion resistance, corrosion resistance.
- 2.Lamp chip using high brightness chip, fully automatic packing technology.
- 3.High stability, good color rendering, high photosynthetic efficiency.
- 4.Better PC material, good toughness and high strength.
- 5.High purity aluminum reflecting cover, high efficiency reflection, no oxidation fade.
- 6.Long life span of over 20,000 hours by normal use.


LED Magnetic Grille Light

CX-20-GS-550L



Application

CX-20-GS-550L



a.wall lighting



b.living room lamps




c.corridor lighting



d.light in the bedroom

Size diagram

CX-20-GS-550L

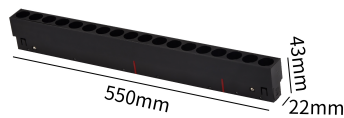

Technical data

CX-20-GS-550L




1	Type of led	SMD 2835
2	Type of material	PC + Aluminum
3	Ip	20
4	Driver	Constant Driver
5	Switch cycle	10000
6	Volt	DC 48V
7	Life time	20000 hours
8	Watt	30W
9	PF	0.9
10	Hz	50Hz / 60Hz
11	Lumen	2250LM
12	Eff	75LM/W
13	CRI	80
14	Size	550*22*43 MM
15	CCT	3000-6000K
16	Beam angle	24
17	DIMMABLE	adjustable



Light distribution

CX-20-GS-550L

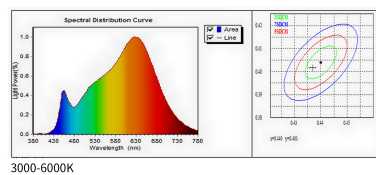


3000-6000K



Package info

CX-20-GS-550L

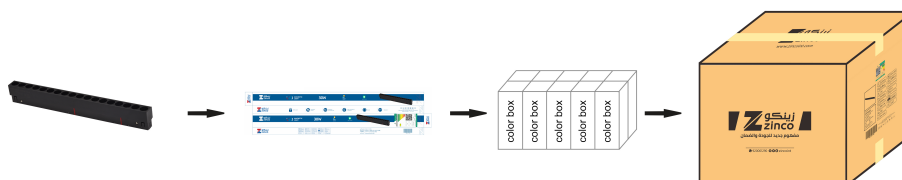

Item No	Size(mm)	Color Box size(mm)	QTY(pcs)	Carton Size(cm)	LUMEN(LM)	Efficiency(LM/W)
CX-20-GS-550L	550*22*43	560*25*45	50	57.5*27*24.5	2250	75

SAFETY:

- 1.Never use in the following fixtures: a.Emergency light fixtures. b.Direct current fixtures. c.Dimming circuit fixtures. d.Close fixtures.
2. Only for indoor use .never install where water may drop on the lamp.
3. When the lamp is faulty ,please destroy it.
4. It is suitable installed in an ambient temperature about 0-45 C.